





## 






## Available options:

- working temperature: from -25°C to -21°C
- hot gas defrosting
- automatic evaporation of condensate
- electronic controller with temperature indicator
- energy saving fans
- exposition: side and bottom wire shelves, powder coated
- colour of the front and base white (RAL 9003)
- flat front bumper; in module TG flat front and side bumper
- lighting: in the handrail, LEDit, CW-2
- integrated sidewalls

Dolomiti WMDO-03 2500 CCP

**Cross sections:** 

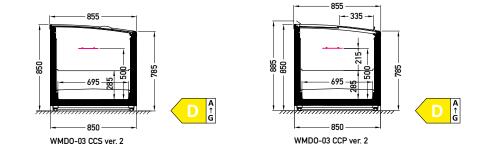

CCS – cover | single, curved | sliding (sideways) CCP – cover | single, curved | sliding (slide-up/push)

Available modules: 1850 2100 2500 1850G

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.