

Everest WNEV-06

CCP | XXX



STANDARD FEATURES


- double island (1 evaporator per module)
- working temperature: from -25°C to -21°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- thermopane glass
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- color of the base – black (RAL 9005)
- WNEV-06-1605G sidewalls integrated

OPTIONS

- electronic expansion valve
- bumper
- sidewalls
- LEDit lighting


Everest WNEV-06 2500 CCP

CCP – cover | single, curved | sliding (slide-up/push)
 XXX – no glazing

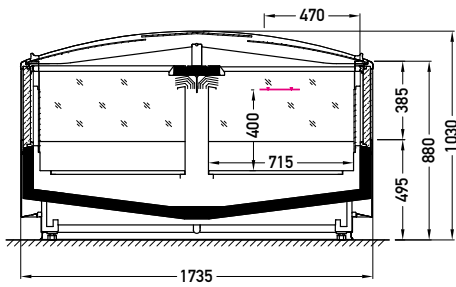


WNEV/WDEV-06 CCP

E A ↑ G
2500

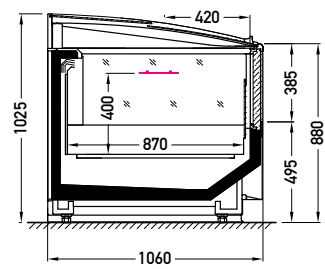


WNEV/WDEV-06-1605G CCP

E A ↑ G
1605

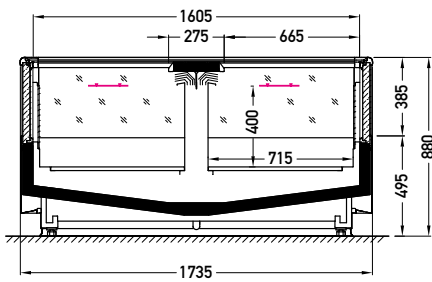

WNEV/WDEV-06 XXX

G A ↑ G
2500

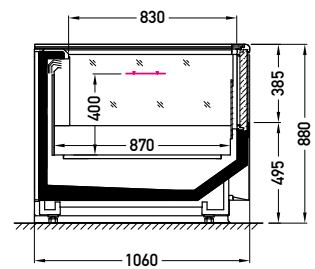

WNEV/WDEV-06-1605G XXX

F A ↑ G
1605

AVAILABLE MODULES

1875 2500 3750
1605G