


WNEV-17 CCP




2500



WNEV-17-1895G CCP




1895

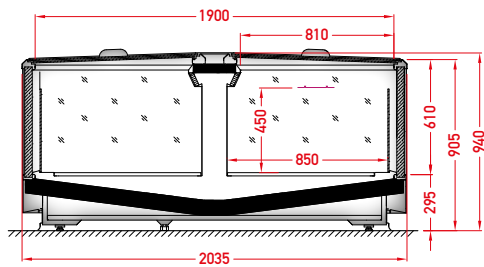

WNEV-17 CSS



2500



WNEV-17-1895G CSS



1895

STANDARD FEATURES

- double island (1 evaporator per module)
- working temperature: from -25°C to -21°C
- electrical defrosting
- 2 x NTC temperature probe (per evaporator)
- siphoned condensate drains
- thermopane glass
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- color of the base – black (RAL 9005)
- WNEV-17-1895G sidewalls integrated

OPTIONS

- sidewalls
- LEDit lighting
- cotroller with electronic expansion valve
- grey PVC bumper

CCP – cover | single, curved | sliding (slide-up/push)
CSS – cover | single, straight | sliding (sideways)

AVAILABLE MODULES
CCP 1875 2500 3750 1895G
CSS 1875 2500 3750 1895G

