

Glacier SNGL-L3

DTO



STANDARD FEATURES


- working temperature: from -25°C to -21°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- 4 rows, on shelves and on air inlet price holders 39 mm
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- lighting: LEDit vertical
- framed doors without heaters
- perspex divider between doors
- color of the base – black (RAL 9005)

OPTIONS

- electronic expansion valve
- bumper
- sidewalls

Glacier SNGL-L3 3123 DTO

DTO — door | triple, straight | hinged

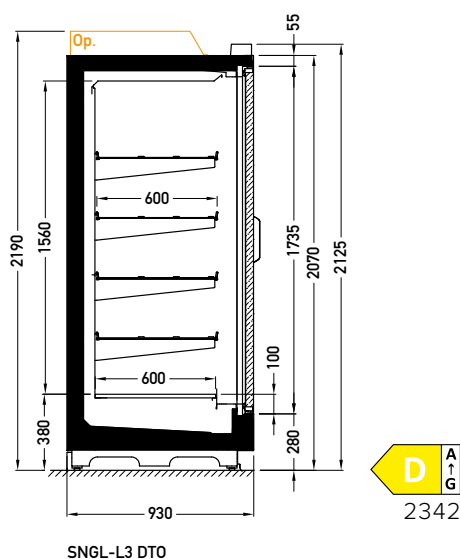

AVAILABLE MODULES

1564 2342 3123 3898