

Iberg 2.0 RDIG-L1/L2/L3 DVO

STANDARD FEATURES

- working temperature: from 0°C to 2°C
- refrigerant: R744
- natural defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- 4 rows of suspended shelves, on shelves and on air inlet price holders 39 mm
- lighting: top, LEDit, NW-4
- color of the base – black (RAL 9005)
- grey PVC bumper on the front of the unit


OPTIONS

- electronic expansion valve
- sidewalls



Iberg 2.0 RDIG-L1 2500 DVO

DVO – door | double, straight (High Vision) | hinged

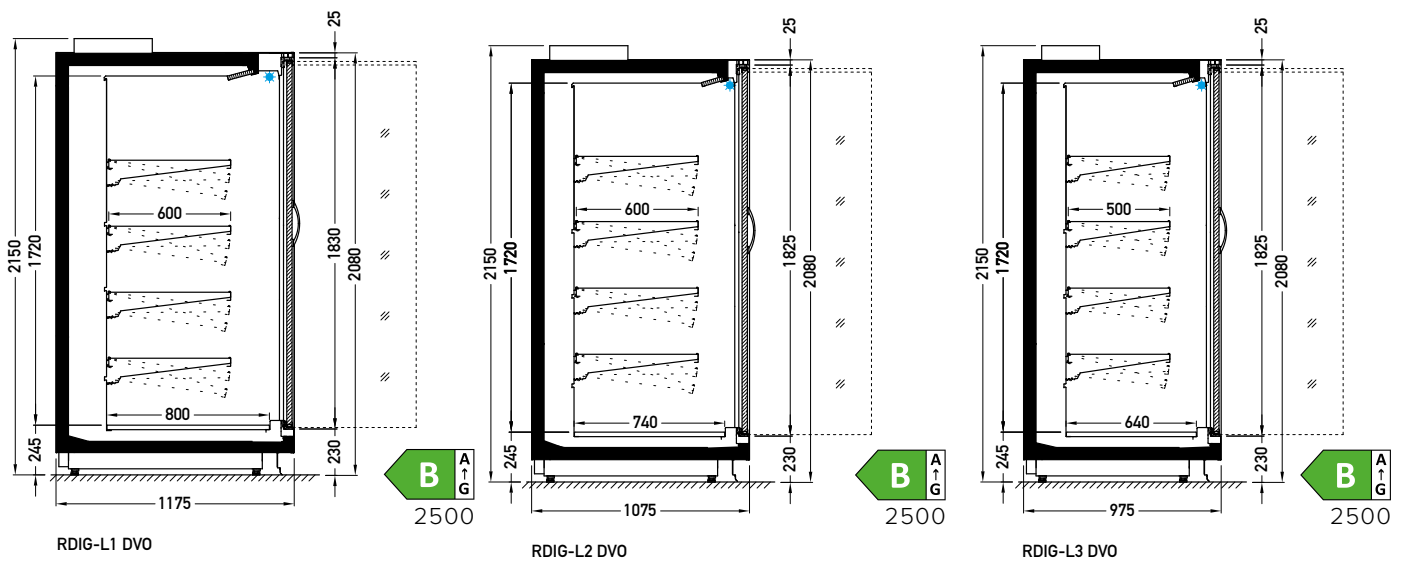

AVAILABLE MODULES

2500 3750

Iberg 2.0 RDIG-L1/L2 BDA

STANDARD FEATURES

- working temperature: from 0°C to 2°C
- refrigerant: R744
- natural defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- 4 rows of suspended shelves, on shelves and on air inlet price holders 39 mm
- lighting: top, LEDit, NW-4
- color of the base – black (RAL 9005)
- grey PVC bumper on the front of the unit
- mechanical night blind


OPTIONS

- electronic expansion valve
- sidewalls




Iberg 2.0 RDIG-L1 2500 BDA

BDA – front glass riser | double, straight | fixed

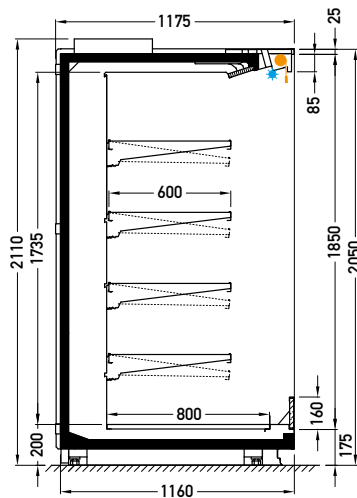

RDIG-L1 BDA

2500

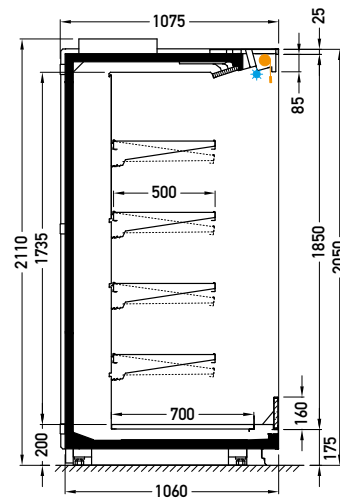

RDIG-L2 BDA

2500

AVAILABLE MODULES

2500 3750