



REMOTE → COUNTERS

Lhotse LDLH-12 2500

CSS | BCA



Module:

2500



Refrigerant:

R744




Available options:

- working temperature: from 0°C to 2°C
- electrical defrosting
- electronic expansion valve
- 2 x NTC temperature probe
- siphoned condensate drains
- 2 exposition: zinc-plated steel, powder coated in white (RAL 9003)
- worktop: linen stainless steel
- LEDit lighting (optionally)
- exposition on the full base
- mechanical night blind in cassette for version BCA
- cascade 3-levels zinc steel (RAL 9003) for version BCA
- without sidewalls (optionally)


Lhotse LDLH-12 1875 BCA



Cross sections:

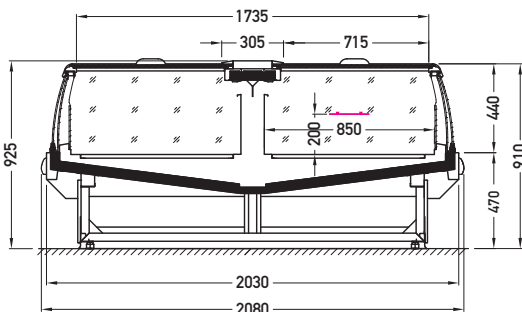

LDLH-12 CSS

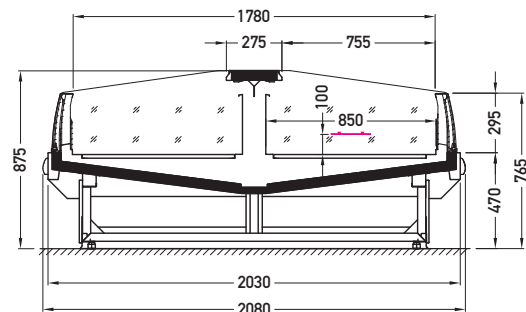

LDLH-12 BCA

CSS – cover | single, straight | sliding (sideways)
BCA – low glass or front glass riser | single, bent | fixed

Available modules: 1875 2500 3750
 1930G