

Lhotse LDLH-36

GSD | GSL

STANDARD FEATURES

- working temperature: from 0°C to 2°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- worktop: linen stainless steel
- GSD without a possibility to install lighting
- exposition on a full base



OPTIONS

- electronic expansion valve
- LEDit lighting
- PVC floor profiles
- bumper
- sidewalls



Lhotse LDLH 36 2500 GSD

GSD – glass | single, straight | divided
 GSL – glass | single, straight | lift up

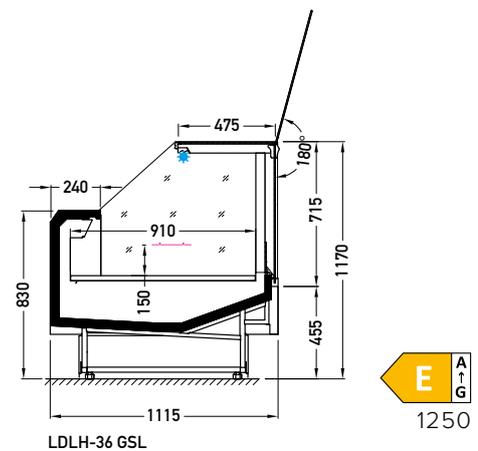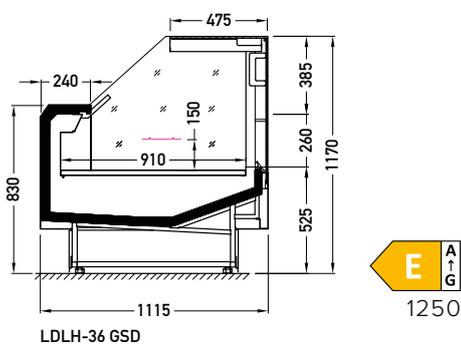

AVAILABLE MODULES

1250 1875 2500 3750