



REMOTE → COUNTERS

Lhotse LDLH-37 0938

GSL | BSA



Lhotse LDLH-37 2500 GSL



Module:

0938



Refrigerant:

R744





Available options:

- working temperature – straight and corner NZC/ NZS GSL from 0°C to 2°C; corner NZC/NZS BSA from 2°C to 4°C (with cascade from 0°C to 2°C); corner NWS from 4°C to 8°C
- electrical defrosting
- electronic expansion valve
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- worktop: linen stainless steel
- LEDit lighting (optionally)
- exposition on a full base
- without sidewalls (optionally)



Cross sections:

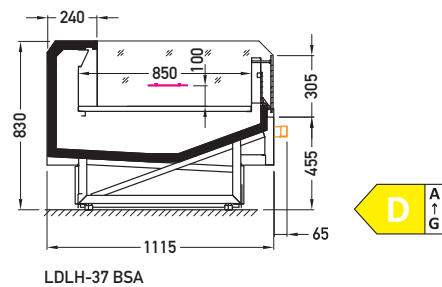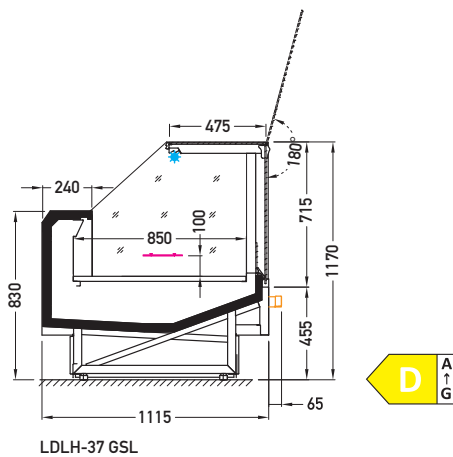

GSL – glass | single, straight | lift up

BSA – low glass or front glass riser | single, straight | fixed

Available modules: 0938 1250 1875 2150 2500 3750
NW45 NW90 NZC45 NZS45 NZS90