



REMOTE → CABINETS

Mix MNMY-H2/L2 2500 CCP



Mix MNMY-H2 2500 CCP



Module:

2500



Refrigerant:

R744





Available options:

- working temperature: from -25°C to -21°C
- electrical defrosting
- mechanical expansion valve for HFC; for R744 units electronic expansion valve
- 2 NTC temperature probes
- siphoned condensate drains
- 3 rows of suspended mesh shelves, on shelves and on air inlet price holders 39 mm
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- lighting of „R” part: in doors frame, vertical, covered – LEDit CW-2
- lighting of „W” part: horizontal, single panel, covered – LEDit CW-2
- framed doors without heaters
- color of the base – black (RAL 9005)
- bumper (optionally)
- without sidewalls (optionally)



Cross sections:

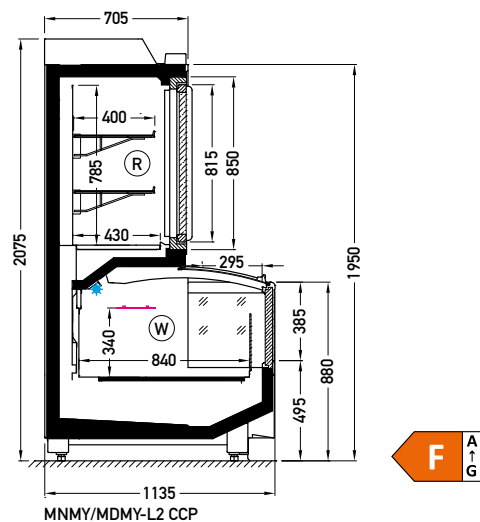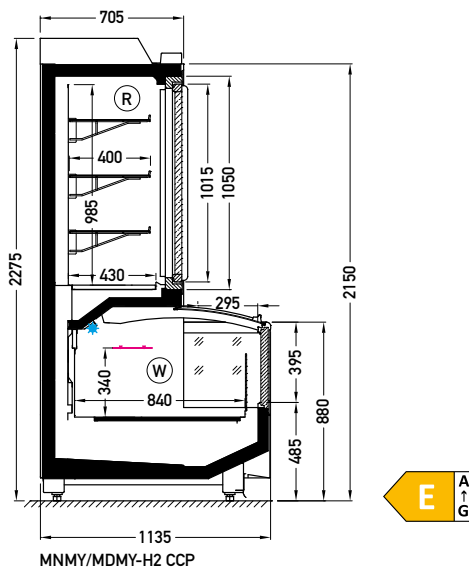

CCP – cover | single, curved | sliding (slide-up/push)

Available modules: 1875 2500 3750